VISIONIS
Technology Within Your Reach

Access Control Outdoor IP66 Weather Proof Card Reader Standalone No Software Wiegand 26-37 Bits 125KHz EM Cards 1,000 Users

REF.
VIS-3009

This product is discontinued

Features

- Waterproof, conforms to IP66
- One relay, 1000 users
- Card type: 125KHz EM
- Wiegand 26~37 bits input & output
- User data can be transferred by Wiegand line
- Pulse mode, toggle mode
- 2pcs device support interlock for two doors

Model No.	VIS-3009
User Capacity	1000 (998 common users + 2 panic users)
Operating Voltage	12~18V DC
Idle Current	< 35mA
Proximity Card Reader	EM
Radio Technology	125KHz proximity card
Read Range	2~6 cm (0.78~2.36 in.)
Wiring Connections	Relay output, exit button
Relay	One (NO, NC, Common)
Adjustable Relay Output Time	1-99 Seconds (5 seconds default)
Lock Output Load	2 Amp Maximum
Wiegand Input/Output	Wiegand 26~37bits
Environment	Meets IP66
Operating Temperature	-40°C ~ 60°C (-40°F ~ 140°F)
Operating Humidity	20% RH ~ 98% RH
Physical	ABS Shell
Dimensions	102L x 48W x 20H (mm) – 4.01L x 1.88W x 0.78 (in.)
Unit Weight	125g
Shipping Weight	185g

Disclaimer: VISIONIS reserve the right to go ahead with any modifications of models or features or price without forewarning. All the information and specifications stated in this document are current at the time of publication. Attention: We are not responsible for the improper installation of this kit. If you are not handy with electrical equipment you should contact a professional electrician. You will also need to check with your local Fire authority to see if you need anything else to comply with local Fire Codes. We are not responsible for any damage or fees that can occur.

sales@visionistech.com
www.visionistech.com

VISIONIS
Technology Within Your Reach

Access Control Outdoor IP66 Weather Proof
Card Reader Standalone No Software
Wiegand 26-37 Bits 125KHz EM Cards
1,000 Users

REF.
VIS-3009

Unique Features

This product is discontinued

1. Convertible working mode

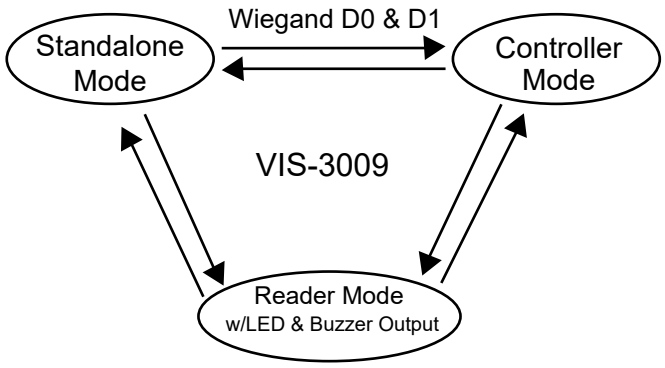

2. User Data Transfer

Notes:

1. The Master Units and Accept Units must be VIS-3009.
2. For full 1000 users enrolled, the transfer takes 3 minutes.

Disclaimer: VISIONIS reserve the right to go ahead with any modifications of models or features or price without forewarning. All the information and specifications stated in this document are current at the time of publication. Attention: We are not responsible for the improper installation of this kit. If you are not handy with electrical equipment you should contact a professional electrician. You will also need to check with your local Fire authority to see if you need anything else to comply with local Fire Codes. We are not responsible for any damage or fees that can occur.

sales@visionistech.com
www.visionistech.com